

TUFFLEX 3000 R17

ID		OD	Working Pressure		Bursting Pressure	
mm	Inch	mm	BAR	PSI	BAR	PSI
6.4	1/4	13	210	3050	840	12200
8.0	5/16	14.8	210	3050	840	12200
9.6	3/8	16.9	210	3050	840	12200
12.7	1/2	20.2	210	3050	840	12200
15.9	5/8	23.8	210	3050	840	12200
19.1	3/4	27.9	210	3050	840	12200
25.4	1	35.5	210	3050	840	12200

TUBE:

Black, oil-resistant synthetic rubber (NBR)

REINFORCEMENT:

Single or Double braided high tensile steel wire

COVER:

Wrap & Smooth Black, oil and abrasion-resistant synthetic rubber

TEMP RANGE:

-40°C to +100°C (+120°C intermittent)

APPLICATIONS:

Petroleum based hydraulic fluids and lubricating oils with extra flexible routing

PROPERTIES:

Uniform Thickness
High Pressure
Flexible

APPLICABLE STANDARDS:


SAE 100 R17

STANDARD COLOUR:

Inner Tube - Black
Outer Cover - Black

MARKING ON THE HOSE:

Indo-Maksson - SAE 100 R17 I.D. W.P.
Made in India

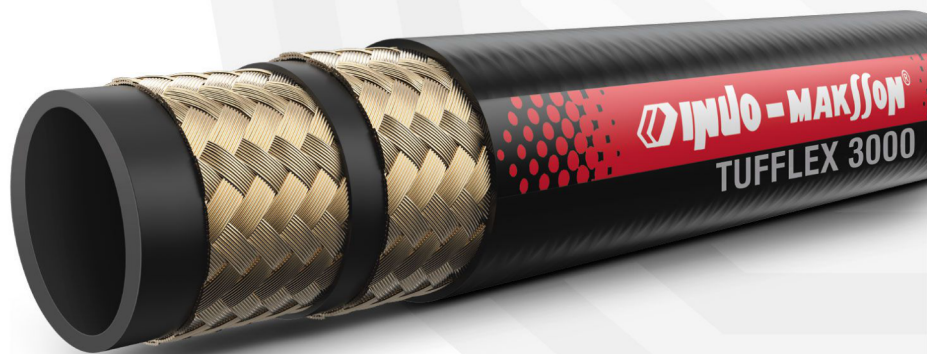

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.