

CARBON FREE HOSE LL

ID		OD	Working Pressure		Bursting Pressure		Bending Radius		Weight	Max. Length
mm	Inch	mm	BAR	PSI	BAR	PSI	mm	Inch	KG/MTR	MTR
10.00	3/8	18.00	17.2	250	69	1000	150	5.90	-	100+
12.50	1/2	22.00	17.2	250	69	1000	102	4.00	0.44	100+
16.00	5/8	26.00	17.2	250	69	1000	115	4.5	0.60	100+
20.00	3/4	29.50	17.2	250	69	1000	127	5.00	0.62	100+
25.00	1	37.00	17.2	250	69	1000	127	5.00	0.91	100+
31.00	1.1/4	44.00	17.2	250	69	1000	152	6.00	1.20	50
38.00	1.1/2	51.50	17.2	250	69	1000	203	8.00	1.35	50
50.00	2	66.00	14	203	56	800	304	12.00	2.60	40

TUBE:

Specially engineered non conductive rubber, white

REINFORCEMENT: SUBJECT TO ID

One or Multiple layers of Textile reinforced subjected to ID

COVER:

Specially engineered Nitrile rubber cover, green

TEMP RANGE:

-40°C to +100°C Approx

APPLICATIONS:

Speciality hose for non conductive applications, majorly catering to furnace coolant conveyance & low current leakage.

PROPERTIES:

Heat Resistant
Non-Conductive tube and cover
Uniform Thickness
Industry Leader

APPLICABLE STANDARDS:


Indo-Maksson Proprietary

STANDARD COLOUR:

Inner Tube - White
Outer Cover - Green

MARKING ON THE HOSE:

Indo - Furnace- Carbon Free Hose LL Heat Resistant
I.D. W.P. India

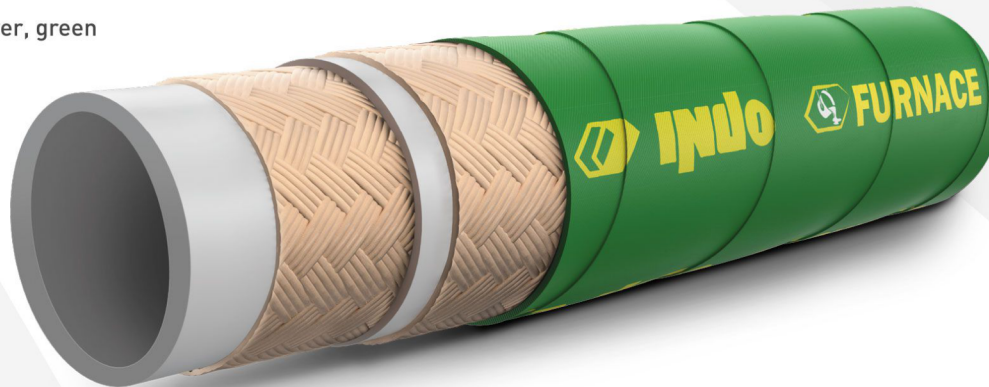

Specification Subject to change due to Improvement in Quality (E&O.E).

In the interest of Continual Development, the Company reserves the right to make modifications to these details without prior notice.