


PAINT SPRAY - 2W

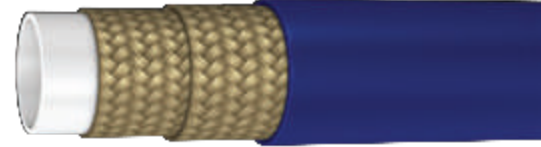

Construction

- Core Polyamide
- Reinforcement Single layer of braided synthetic fibre and single layer of braided steel wire
- Cover Polyurethane, Blue Colour, pin pricking (Optional)
- Application High pressure airless paint spray systems for 150 to 450 bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids. Due to low permeation value of polyamide, the hose is also suitable for industrial gases

| ID | | OD | | WP | | BP | | BR/r | |
|------|-----|-------|------|-------|-----|--------|-------|------|-----|
| inch | mm | inch | mm | psi | bar | psi | bar | inch | mm |
| 1/4 | 6.4 | 0.540 | 13.7 | 7,200 | 500 | 26,000 | 1,800 | 4.0 | 100 |
| 5/16 | 8.0 | 0.600 | 15.2 | 5,800 | 400 | 23,200 | 1,600 | 4.3 | 110 |
| 3/8 | 9.5 | 0.690 | 17.5 | 7,200 | 500 | 22,000 | 1,520 | 5.0 | 127 |



Temperature Range: Continuous: -40°C to +100°C
Temp. not to exceed +70°C for Air and Water based fluids

